


KXX

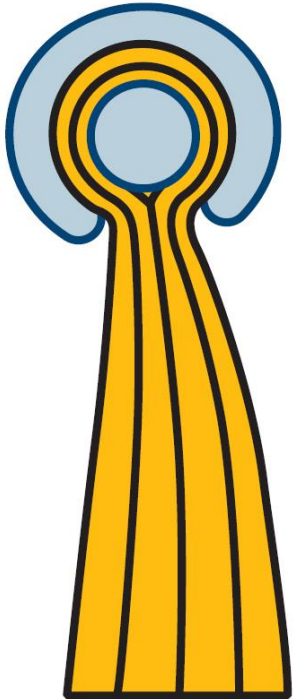

Sealing Element		
Material	Aramid (Kevlar)	
Fiber Diameter	12 μm	4000/6350 Fpmm

Dimensions	
Width	2,5 / 3,5 mm
Height	~ 5 -10 mm

Operating Condition	
Application	static (axial/radial/3D) dynamic (axial/radial)
Operating Medium	Gas / Fluid
Pressure	up to 15 bar
Temperature	up to 200 °C
Surface Speed	up to 500 m/s
Relative Movement Radial	up to 0,3 mm
Relative Movement Axial	no limit